

## PHMS09 APOLLO NL1 SUCTION HOSE


Grey plasticized PVC hose manufactured with super elastic material and reinforced with anti-shock rigid PVC spiral.

### Features:

Special formation conceived for keeping high nexinity even at low temperatures. Its exposed spiral allows less resistance to dragging. Inside smooth and corrugated outside, it resists to weather agents and most chemicals. On request, it can be manufactured in antistatic version with copper wire.

### Application:

Waste management, excellent solution for suction and discharge of industrial water, slurries and liquids; particularly suitable to be used on tank trucks.

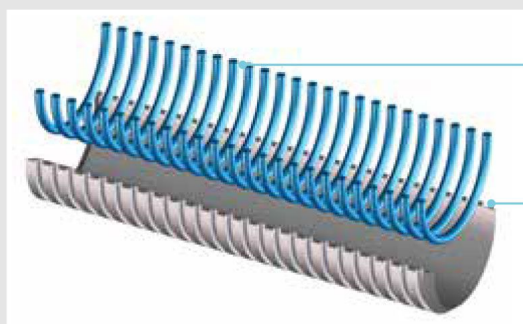

Spirale in PVC rigido antiurto  
Anti-shock rigid PVC spiral

Tubo in PVC / PVC hose

### Technical Data

Size [mm]	Min Wall Thick [mm]	Max Wall Thick [mm]	Weight [g/m]	W.P. bar	B.P. bar	Vac [m H2O]	Bending [mm]	Coil Length [m]	Vol [m <sup>3</sup> ]
025	2.7	3.8	340	5.0	15	8	130	50	0.084
032	3.0	4.3	500	5.0	15	8	130	50	0.129
038	3.3	4.8	650	4.2	12.5	8	140	50	0.183
051	3.6	5.3	940	3.5	10.5	8	180	50	0.262
063	3.9	5.8	1320	3.0	9	8	230	50	0.433
076	4.2	6.2	1620	3.0	9	8	290	50	0.638
102	4.8	7.7	2580	2.0	6	7	380	30	0.676
127	5.2	8.2	3430	2.0	6	7	500	30	1.101
152	6.1	9.4	4830	1.5	4.5	7	630	20	1.315

DS-PHMS09

REV: SEPTEMBER 2020