

Vortex Dirty Water BlueVort 7 & 9

- Multi-purpose vortex pump
- Ideal for sullage pits and dirty water pump outs
- Stainless steel motor casing and cast iron base and cover


2
YEAR
WARRANTY



Carry Handle



Diameter Particles
BlueVort 7 15mm
BlueVort 9 25mm

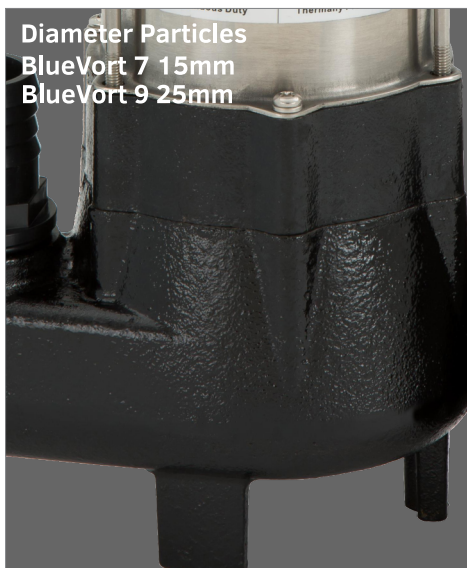

Float Switch



	Model	BlueVort 7	BlueVort 9
Electrical data	P2 Power consumption [W]	180	450
	Voltage [V]	1 ~ 240 AC	1 ~ 240 AC
	Frequency [Hz]	50	50
	Current [A]	1.75	4
	Capacitor nF	8	15
	Capacitor Vc	450	450
Hydraulic data	Flow rate max. [l/min]	135	200
	Max. Head [m]	7	8.5
	Max. Immersion depth [m]	5	5
	Depth for switching off [mm]	400	400
	Low suction capability [mm]	40	60
Range of use/materials	Length of Power Cable [m]	10	10
	Cable	H07 RNF	H07 RNF
	Pump International protection	IP X 8	IP X 8
	Insulation Class	B	B
	Liquid range Temperature [°C]	0 °C / +40 °C	0 °C / +40 °C
	Dimension of particles [mm]	15	25
Dimensions / weight	L x W x H [mm]	180 x 120 x 370	240 x 150 x 460
	LM [mm]	122	150
	L1 [mm]	165	240
	HM [mm]	367	460
	Discharge Thread BSP	1" 1/2 M	2" M
	Box Dimensions l x w x h [cm]	22 x 21 x 41	26 x 21 x 53
	Net/Gross Weight [kg]	9	19
	Quantity for pallet [no.]	75	40

