

**Receiver**
**From**

 Society  
 Reference  
 Address  
 Phone  
 Fax  
 E-mail

**Item n° :**

504200640

**Model :**

S4C-25

**Pump data**

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 40 °C

Max. Temperature operating :

**Requested data**

Flow : 0 m³/h

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³

Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100 kPa

**Hydraulic data (duty point)**

Flow :

Head :

**Materials**

Lower support	AISI 304 micro use
Impeller	Technopolymer A / AISI 304
Diffuser	Technopolymer A
Impeller Lock nut	Stainless steel
Cable cover	AISI 304 X5 Cr Ni 1810 UNI 6900/71
Shaft with rotor	AISI 304 X5 Cr Ni 1810 UNI 6900/71
Filter	Stainless steel

**Motor data**

Motor brand :

Nominal power P2:



Rated voltage :

Nominal current :

Number of poles :

Rated speed :

Degree of protection :

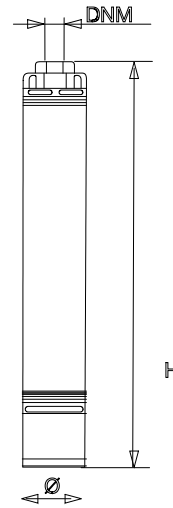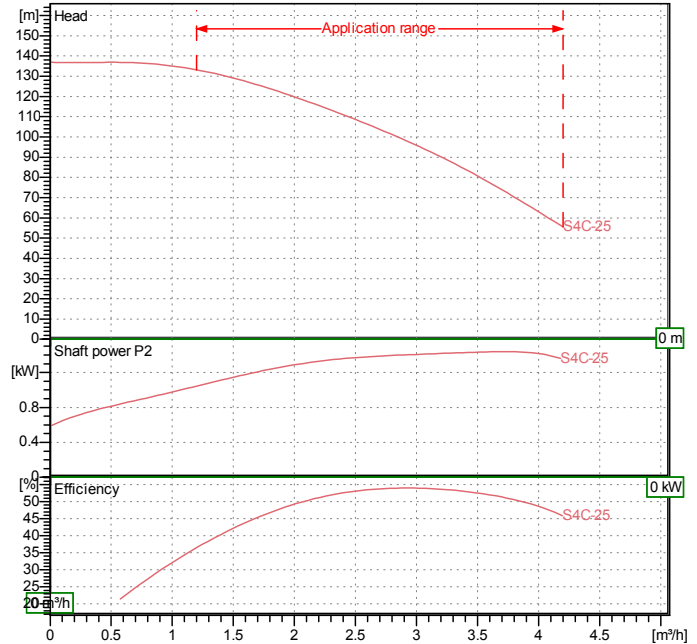**Curve tolerance according to ISO 9906**

**Weight :** 7.2 kg

**Dimensions in mm**

DNM	1"1/4 G-F				
H	994.5				
Ø	97				


**Pump connection**

 Suction side /  
 Discharge side 1" 1/4 G-F / --

Society Reference Address Phone Fax E-mail	<b>Receiver</b>	<b>From</b>

## S4C-25

Curve tolerance according to ISO 9906

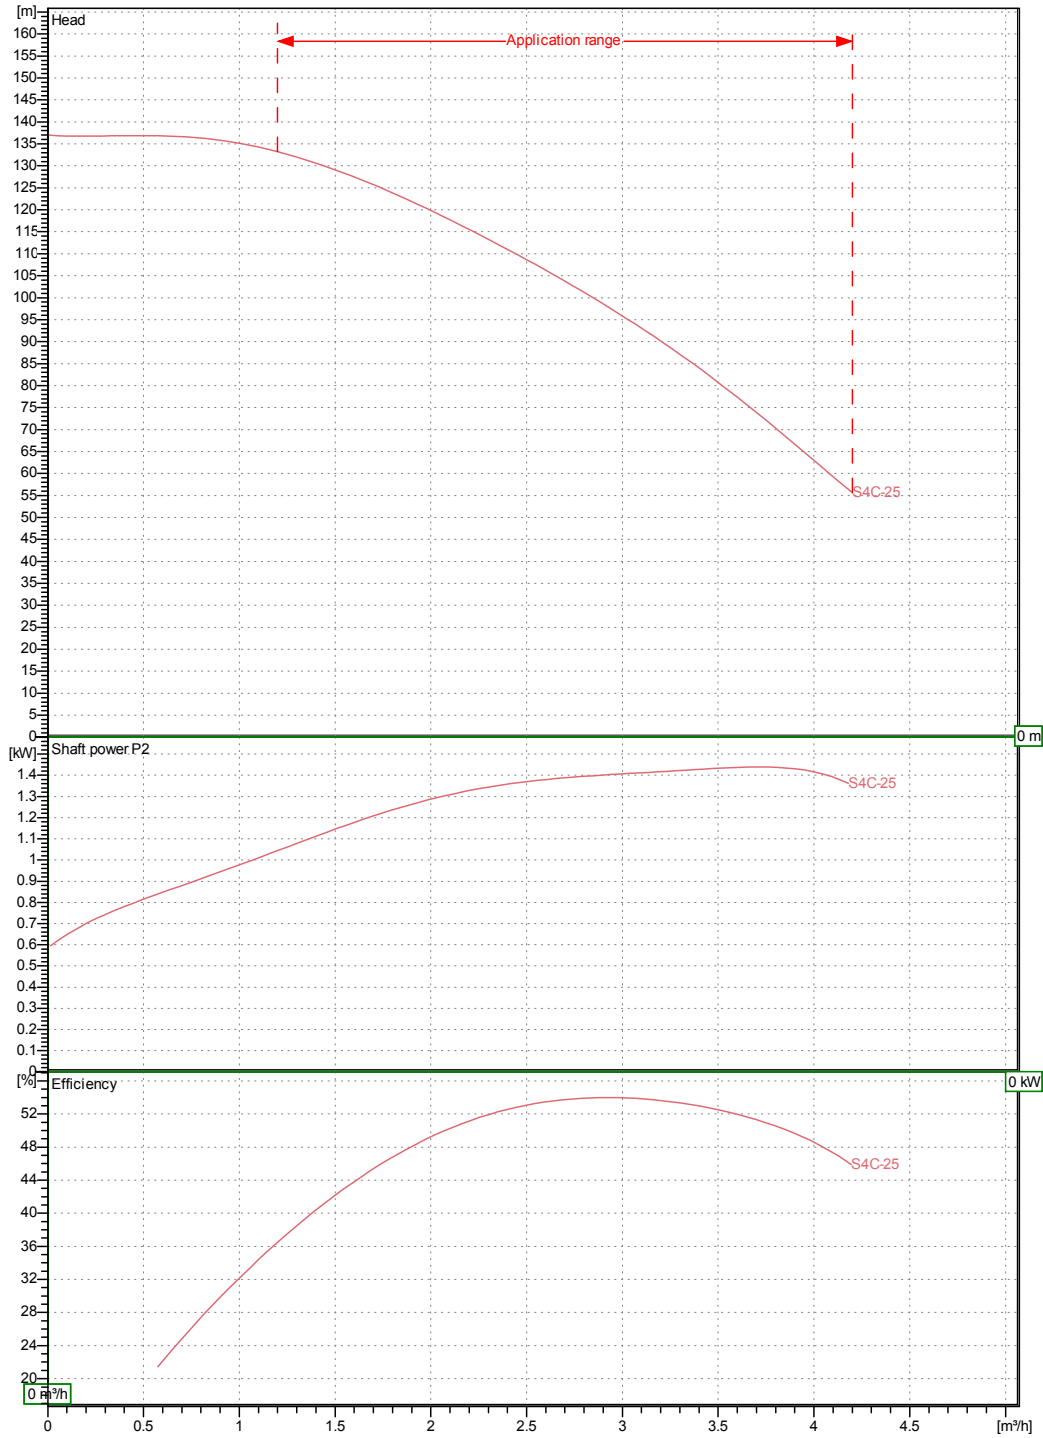

Hydraulic data (duty point)

Suction side	Discharge side 1 " 1/4 G-F	Flow : 0 m³/h	Head : 0 m	Rated speed :
Project	Project ID	Created by	Created on <b>06/01/2015</b>	



WATER • TECHNOLOGY

# DIMENSIONAL DRAWING

07/01/2015

Page 3 / 3


DAB PUMPS S.p.A.  
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy  
Tel. +39 049 5125000 - Fax +39 049 5125950  
www.dabpumps.com

Receiver

From

Society  
Reference  
Address  
Phone  
Fax  
E-mail

## S4C-25

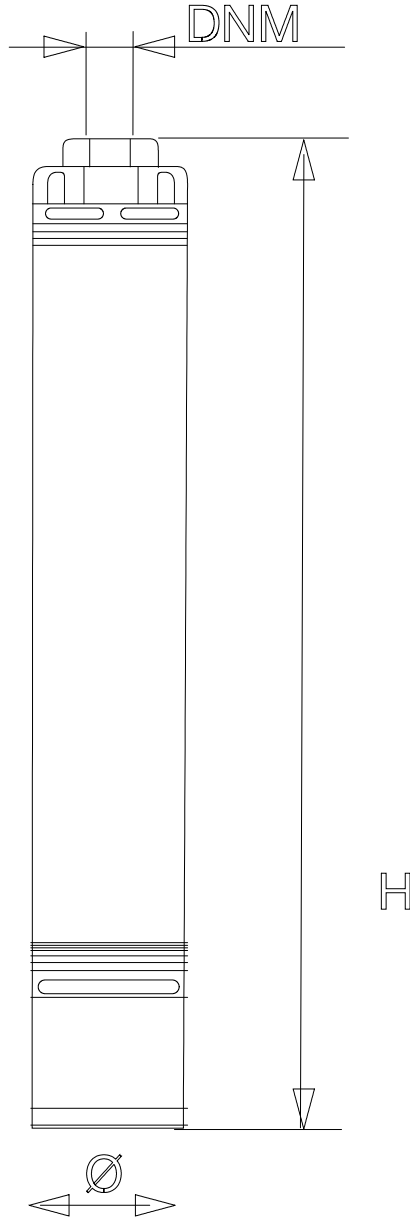

### Dimensions in mm

Item	Symbol	Value	Unit	Notes
1	DNM	1"1/4 G-F		
2	H	994.5		
3	Ø	97		

### Pump connection

Suction

Discharge  
1 " 1/4 G-F  
-

Project

Project ID

Created by

Created on

06/01/2015